

12

EUROPEAN PATENT SPECIFICATION

45 Date of publication of patent specification: 07.01.88

21 Application number: 83306050.2

22 Date of filing: 06.10.83

51 Int. Cl.⁴: C 08 G 18/81, C 08 G 18/67,
C 08 F 299/02, C 08 G 59/16,
C 09 D 3/58, C 09 D 3/81,
H 01 B 3/44

54 UV curable composition and coatings.

30 Priority: 07.10.82 US 433324

43 Date of publication of application:
30.05.84 Bulletin 84/22

45 Publication of the grant of the patent:
07.01.88 Bulletin 88/01

84 Designated Contracting States:
BE CH DE FR GB IT LI

56 References cited:
EP-A-0 044 150
DE-A-2 618 986
DE-A-2 631 949
GB-A-2 107 334

71 Proprietor: WESTINGHOUSE ELECTRIC
CORPORATION
Westinghouse Building Gateway Center
Pittsburgh Pennsylvania 15222 (US)

72 Inventor: Sattler, Frank Anton
120 Jamison Lane
Monroeville Pennsylvania (US)
Inventor: Gorton, Willaim Stuart, Jr.
145 Clyde Road
Athens Georgia (US)

74 Representative: Marchant, James Ian et al
Elkington and Fife High Holborn House
52/54 High Holborn
London WC1V 6SH (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European patent convention).

Courier Press, Lëamington Spa, England.

EP 0 109 744 B1

Description

This invention relates to UV curable compositions.

In the manufacture of insulated strip conductor for transformers, bare metal strips are coated with a resin, the resin is cured, and the coated strips are wound into supply coils. Coated strips are typically made by passing bare aluminum strips through a solvent-based enamel, then into a heating tower to evaporate the solvent and cure the enamel. Typically, about three passes are required to obtain a sufficiently thick build on the strips to provide adequate insulation. This process is not as economical as it might be because heat is needed to evaporate the solvent, and the solvent must then be collected or incinerated to prevent environmental pollution.

A 100% solids enamel can also be used for coating the strips. Such enamels can be prepared by using a monomer instead of a solvent. An oligomer is dissolved in the monomer and the monomer then reacts with the oligomer during cure. While this eliminates the solvent, these enamels cure slowly and some of the monomer is still lost to evaporation.

Another difficulty in formulating suitable compositions for this purpose, is that it is difficult to find polymers which are stable in the hot oil environment of transformers. Oil-filled transformers contain paper insulation which releases water when the transformer is in operation. The hot water then hydrolyzes the polymer coated on the strips, especially if they are condensation polymers. The problem is aggravated by the presence of acid. The acid degrades the paper, releasing still more acid, a chain reaction which can rapidly destroy the paper insulation. An acid also accelerates an aqueous attack against a condensation polymer. Acid acceptors are usually added to neutralize the acid, but if the pH in any area of the transformer is too high or too low, the polymer in that area may be attacked by hydrolysis.

U.S. Patent 4,221,686 discloses an ultraviolet radiation curable printing ink which is the reaction product of (1) a compound prepared by reacting an unsaturated monobasic acid such as acrylic acid with a polyisocyanate compound such as toluene diisocyanate and (2) a compound prepared by reacting an epoxy compound with an unsaturated monobasic acid. The curing is accomplished by ultraviolet irradiation in the presence of benzoin methyl ester, a photoinitiator.

U.S. Patent 3,373,221 discloses a composition prepared by reacting a polyepoxide with an unsaturated mono- or di-carboxylic acid followed by reacting the resultant product with an organic poly-isocyanate.

EP—A—0044150 discloses a solventless thermosetting cement coat composition, curable with UV light to the B-stage and then with heat to the C-stage consisting of

(A) from 40 to 90% of a solution of from 25 to 50% monoacrylate and from 50 to about 75% of a compound selected from an acrylated epoxy, an amine terminated acrylate epoxy resin, an acrylated urethane, or mixtures thereof;

(B) 0 to 35% of a solution of from 50 to 80% end-blocked urethane and from 20 to 50% monoacrylate;

(C) 0 to 43% of a solution of from 70 to 90% acrylated hexamethoxymethyl melamine and from 10 to 30% monoacrylate;

(D) 0 to 35% of a solution of from 80 to 90% low molecular weight cresol formaldehyde resin and from 10 to 20% monoacrylate;

(E) from 0.5 to 5% of a UV photoinitiator; and

(F) from 0.2 to 2% of a curing agent.

We have now discovered an ultraviolet curable composition which is particularly suitable for coating the strip conductors used in forming transformer coils. The composition of this invention is completely solventless and therefore avoids the problems of energy consumption in heating and evaporating the solvent, solvent pollution, and the cost of solvents. The composition produces smooth, uniform coatings and to be successfully applied, does not require critical control of the speed of the strip under the ultraviolet lights.

The most extraordinary property of coatings produced with the compositions of this invention is the unexpectedly long thermal life that the coatings have in an oil-filled transformer. Surprisingly, the coatings perform better than the formvar wire enamel standard (a polyvinyl formal blend which usually contains a phenolic resin, an isocyanate, and a melamine formaldehyde resin) which still is used in transformers. In tests which were performed on transformers under extreme temperature conditions, coatings made according to this invention remained intact long after the other components of the transformer had failed. This was a rather unusual finding because when the coatings were tested in air they did not exhibit such an extraordinary long thermal life, so that one could not have predicted that they would have this property in a transformer.

The present invention provides a UV curable coating composition characterised in that said composition comprises

(A) from 20 to 40% by weight of an acrylated epoxy which comprises the reaction product of about 2equiv. of an epoxy resin having an E.E.W. of from 1500 to 5000, and from 0.9 to 1.1 equiv. of

(1) an anhydride acrylate adduct where said anhydride acrylate adduct has a functionality of 1 except in the case of trimellitic anhydride where said adduct has a functionality of 2, where said anhydride acrylate adduct comprises the reaction product of

(a) an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate, and mixtures thereof; and

(b) 1 mole, ± 10 mole %, per mole of said acrylate of an anhydride selected from phthalic anhydride, maleic anhydride, trimellitic anhydride, and mixtures thereof; and/or

(2) an isocyanate which comprises the reaction product of

(a) 1 mole of an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate, and mixtures thereof; and

(b) 1 mole of toluene diisocyanate, 4,4'-diisocyanatodiphenylmethane, or mixtures thereof.

(B) from 4 to 15% by weight of an acrylated blocked isocyanate which comprises the reaction product of 1 mole caprolactam and 1 mole of an isocyanate adduct which comprises the reaction product of

(1) 1 mole of an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate, and mixtures thereof; and

(2) from 0.99 to 1.01 mole of a compound selected from toluene diisocyanate, 4,4'-diisocyanatodiphenylmethane, and mixtures thereof;

(C) from 45 to 65% by weight of a monoacrylate, of which at least 60% by weight is phenoxyethyl acrylate;

(D) from 5 to 20% by weight of a polyacrylate, of which at least about 50% is tetraethylene glycol diacrylate;


(E) from 2 to 5% by weight of a photoinitiator;

(F) from 0.05 to 0.3% by weight of inhibitor; and

(G) up to 30% by weight of a compound selected from acrylated hexamethoxymethyl-melamine, acrylated urethane, and mixtures thereof.


The composition of this invention is prepared by blending a number of separate components, some of which must be specially prepared in several reactions.

In the first step of this invention an anhydride or isocyanate acrylate adduct is prepared by reacting an acrylate with an anhydride or a diisocyanate. Acrylates which are useful in preparing the anhydride or isocyanate acrylate adduct are 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate, and mixtures thereof. Of these three acrylates, 2-hydroxyethyl acrylate and 2-hydroxypropyl acrylate are preferred as they react faster in the final UV cure. The anhydrides which can be used are phthalic anhydride, maleic anhydride, trimellitic anhydride, and mixtures thereof. Trimellitic anhydride is preferred because it results in a dicarboxylic acid after the adduct formation which does not end block as the monocarboxylic acids produced by other two anhydrides do. The reaction of the acrylate with the anhydride occurs with the hydroxyl group of the acrylate, opening the anhydride ring to produce an anhydride acrylate adduct having an ester linkage with a carboxylic group at one end and an acrylate group at the other.

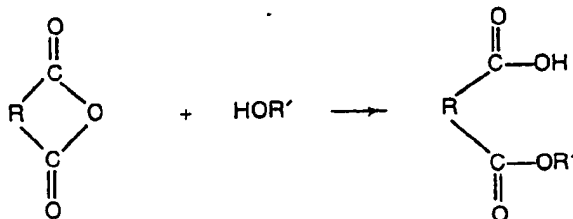

The reaction of the anhydride with the acrylate can be conducted at 120°C for an hour and a half; if trimellitic anhydride and 2-hydroxyethyl acrylate are used the reaction is complete at an acid number of 364. One mole, ± 10 mole % of the anhydride is used per mole of the hydroxy acrylate to prepare the anhydride acrylate adduct.

An isocyanate acrylate adduct can be prepared by reacting the hydroxy acrylate with a diisocyanate. The diisocyanates which can be used are toluene diisocyanate, 4,4'-diisocyanato diphenyl methane, or mixtures thereof. One mole of the diisocyanate, ± 1 mole%, is reacted with each mole of the acrylate. The reaction occurs between the isocyanate group and the hydroxyl group of the acrylate. The product is an isocyanate acrylate adduct having a urethane linkage with an isocyanate at one end and an acrylate group at the other:




The reaction of the diisocyanate with the acrylate occurs at about 70°C and is complete in from 1 to 2 hours. The acrylate adduct is preferably prepared by reaction of the anhydride with the acrylate rather than by reaction of the diisocyanate with the acrylate because the anhydride acrylate adduct produces better properties in the coating. Both reactions should be performed in the presence of an acrylate polymerization inhibitor, preferably benzoquinone or hydroquinone, which should be present whenever an acrylate is being reacted and its polymerization (cure) is not desired. The inhibitor remains present with the acrylate adduct reaction products for use in subsequent reactions.


In the next step of this invention the anhydride acrylate adduct, isocyanate acrylate adduct, or mixture thereof is reacted with an epoxy resin to produce an acrylated epoxy. Any epoxy may be used, including bisphenol A epoxies, bisphenol S epoxies, hydantoin epoxies, epoxy novolacs, cycloaliphatic epoxies, or mixtures thereof. Bisphenol A epoxies are preferred as they give the best flexibility and the toughest coatings. The epoxy resin should have an epoxy equivalent weight (E.E.W.) of from 1500 to 5000 as below 1500 the coatings are too brittle and above 5000 the composition is too viscous.

The reaction of the acrylate adduct with the epoxy resin is conducted in a solution of acrylate monomers to reduce the viscosity. From 40 to 60% by weight of the total of the acrylate adduct, the epoxy resin, and the monomer, should be mixed monomers. The composition of the acrylate monomer mixture ranges from 70 to 90% by weight mono-acrylate and from 10 to 30% polyacrylate. If less than 70% mono-acrylate is used, the resulting coating will lose heat shock resistance and if more than 90% monoacrylate is used the coating has poorer cut-through resistance. At least about 60% of the mono-acrylate used in the entire composition should be phenoxyethyl acrylate as it has the best solvent power in the composition and produces more flexible coatings. Another monoacrylate which can be used is dicyclopentadiene acrylate. At least about 50% of the polyacrylate used in the overall composition should be tetraethylene glycol di-acrylate as that polyacrylate does not reduce the flexibility of the coatings as much as other polyacrylates. Other suitable polyacrylates include trimethylpropane triacrylate, hexanediol diacrylate, and neopentyl glycol diacrylate. The polyacrylate need not be added at this step but may be added at another point in forming the composition, and is preferably not added until the final blend is prepared.

If the acrylate adduct is prepared from an anhydride, the 1 equivalent of carboxyl in the acrylate adduct, ± 10 equivalent %, is reacted with 2 equivalents of the epoxy resin to make the acrylated epoxy. The reaction of the anhydride acrylate adduct with the epoxy resin can occur at from 140 to 150°C for from 1 to 2 hours; the reaction is complete when an acid number is reached of less than 3. The reaction is believed to occur between one of the epoxy groups on the epoxy resin and the carboxyl group of the acrylate adduct to produce an acrylated epoxy having an ester linkage:

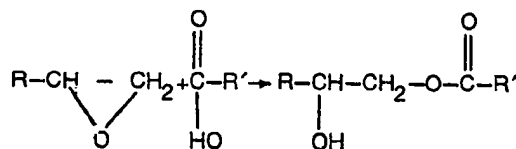


If the acrylate adduct is prepared from a diisocyanate, then 1 equivalent of the acrylate adduct, ± 10 mole % is reacted with 1 equivalent of the epoxy resin. The reaction is believed to occur between the isocyanate group and the hydroxyl group of the epoxy resin to produce an acrylated epoxy having a urethane linkage:

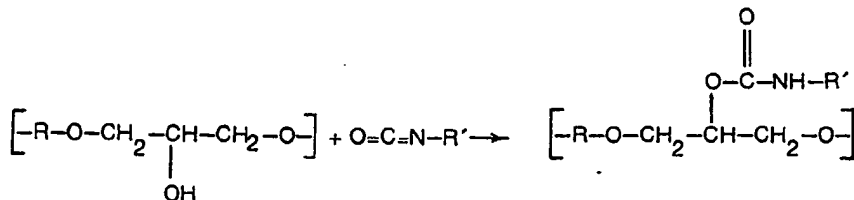

The reaction between the epoxy resin and an isocyanate acrylate adduct will occur at 120° after about 1 hour.

In the next step of this invention, an isocyanate hydroxy acrylate adduct, prepared as described above, is reacted with caprolactam to produce an acrylated blocked isocyanate. About 1 mole of caprolactam is reacted per mole of acrylate adduct, ± 1 mole %. The reaction will occur at 100°C for about 1 hour. The reaction is believed to occur between the isocyanate group and an active hydrogen on the caprolactam ring to form a urethane linkage.

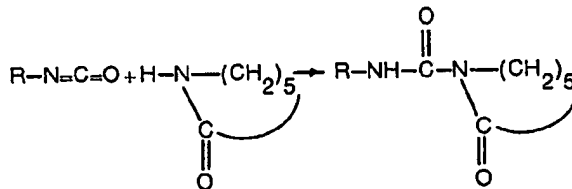

In this reaction, inhibitors should also be present as before to prevent the polymerization of the acrylate

groups. Also, from 20 to 40% by weight of a monomer, based on the total weight of the acrylated blocked isocyanate and the monomer, should be present to solubilize the product.

In the next step of this invention, the acrylated epoxy and the acrylated blocked isocyanate are blended with the other components of the composition which have not already been added to those two components. This includes a photoinitiator which may be benzoin ether, 2,2-dimethoxy-2-phenyl acetophenone, or other common UV photoinitiators. Other optional components which may be added include an acrylated hexamethoxymethylmelamine, an acrylated urethane, or mixtures thereof for a higher thermoplastic flow temperature (cut through); preparation of these materials is described in Examples 17 and 18.

The overall composition comprises from 20 to 40% of the acrylated epoxy, from 4 to 15% by weight of the acrylated blocked isocyanate, from 45 to 65% of the monoacrylate, of which at least 60% is phenoxyethyl acrylate, from 5 to 20% polyacrylate, of which at least 50% is tetraethylene glycol diacrylate, from 2 to 5% photoinitiator, from 0.05 to 0.3% inhibitor, and up to about 30% of an acrylated hexamethoxymethylmelamine, an acrylated urethane, or mixture thereof. If less than 20% of the acrylated epoxy is used, the coatings lose flexibility, toughness, and hydrolytic stability, and if more than 40% of acrylated epoxy is used, the coatings lose cut-through resistance. If less than 4% of the acrylated blocked isocyanate is used, the coatings lose cut-through and if more than 15% of the acrylated blocked isocyanate is used, the coatings lose flexibility and heat shock. If less than 45% of the mono-acrylate is used, the composition becomes too viscous to work with easily, and if more than 65% of the mono-acrylate is used, the resulting coatings will lose hardness and cut-through resistance. If less than 5% polyacrylate is used, there will be a loss of cut-through resistance and if more than 20% polyacrylate is used, the coatings will lose heat shock and flexibility. If less than 2% photoinitiator is used, the reaction will occur too slowly and the product will be tacky; more than 5% photoinitiator is unnecessary and wasted. If less than 0.05% inhibitor is used, the composition will have poor tank stability and if more than 0.3% inhibitor is used, the reactions will be slow. If more than 30% acrylated hexamethoxymethylmelamine, acrylated urethane, or mixture thereof is used flexibility and adhesion are reduced. The preferred composition ranges are from 25 to 35% by weight acrylated epoxy, from 4 to 10% acrylated blocked isocyanate, from 50 to 60% monoacrylate, from 7 to 11% polyacrylate, from 2 to 5% photoinitiator, from 0.05 to 0.3% inhibitor, and from 10 to 20% acrylated hexamethoxymethylmelamine, acrylated urethane, or mixture thereof.

The composition may be used to coat any conductive substrates including such metals as steel, copper, and aluminum; aluminum is especially desired as it is commonly used in transformer coils. The coating can be most easily applied to a conductor by dipping the conductor in it and wiping off the excess. The coated substrate is then passed between a bank of ultraviolet lights which rapidly cures the coating. The lights should be of sufficient intensity to cure the coating, but wavelength and time beneath the lights is not particularly critical. Fusion systems Mercury H bulbs with over 50% of the spectrum in the ultraviolet spectra can be used; the power of these lamps is typically from 200 to 300 Watts per inch. The irradiated coated conductor can then be wound into coils and stored or it can be used immediately.

The invention is most suitable for coating aluminum strip used in forming distribution and power transformer coils. The cross-section of the strips commonly ranges from 10 to 70 mils thick and 3 to 18 inches wide. The strips are then wound into coils which are then made into transformers. A post-cure is then applied of about 130°C for about 4 to 17 hours. Since transformers are typically dried and baked under those conditions before use anyway as a standard procedure, no additional heating step is required in making transformers.

The invention will now be illustrated with reference to the following Examples. The examples generally proceed from less optimal or more optimal formulations. The results of Examples 1 to 12 are given in the table which follows. Examples 11, 12, 17 and 18 illustrate the invention and the remaining examples are presented for the purpose of comparison.

Example 1

Part I. The following materials were charged into a two-liter reaction flask equipped with a stirrer, thermometer, nitrogen sparge tube, and short air condenser:

116.1 g 2-hydroxyethyl acrylate
148.1 g phthalic anhydride
2.0 g benzoquinone

The reaction mixture was heated at 110—115°C for approximately 1—1/2 hours to an acid number of approximately 212 to produce an anhydride acrylate adduct.

Part II. At this point, 356.0 g of an epoxy novolac having an epoxy equivalent weight of 178 which was dissolved in 266 g of 2-phenoxyethyl acrylate was added to the anhydride acrylate adduct of Part I along with 1.2 g of triethanolamine. The reaction was continued at 125—130°C for two hours to an acid number of 10.6, which produced an acrylated epoxy. The reaction product was cooled below 60°C and 35.6 g of benzoin ether, a photoinitiator sold by Stauffer Chemical Company under the designation "Vicure 10," was added.

The formulation was coated onto an aluminum Q-panel by pulling the wet panel through two grooved metering bars (die pins) held in a spring-loaded fixture. The die pins were separated by shims (25 mil panel—28 mil shims). The wet coated panel was irradiated by exposing it to 10FPM to two ten-inch Fusion Systems "H" lamps at 300 watts/inch, to polymerize the coating and then tested. Additional panels coated

and polymerized in this manner were post-cured for four hours at 145°C and tested in the post-cured condition.

The preliminary evaluation consisted of the following tests:

1. Build
2. Pencil Hardness (ASTM D3363—74)
3. Bend Test (45°—90°—180° bend on 1/16 inch mandrel)

A film with fair hardness (3B to 3H post-cured) but poor flexibility (45°—90° bend), both with and without post-cure, was obtained.

Example 2

To 132.1 g of the acrylate adduct prepared in Part I of Example 1 was added 145.0 g of a hydantoin epoxy having an epoxy equivalent weight of 145 dissolved in 119.0 g phenoxyethyl acrylate. The materials were heated in a one-liter reaction flask as in Example 1 at 125—130°C for two hours to an acid number of 2, then cooled. To 50.0 g of the reaction product were added 2.0 g of "Vicure 10" photoinitiator, 0.25 g of tertiary butyl perbenzoate, and 0.02 g of fluorocarbon wetting agent sold by the 3M Company under the trade designation "FC 430". After coating and curing the ultraviolet light, the film was hard but brittle.

Example 3

Part I. Into a one-liter reaction flask was charged the following:

- 348.2 g toluene diisocyanate (80% 2,4 toluene diisocyanate and 20% 2,6-toluene diisocyanate)
- 232.2 g 2-hydroxyethyl acrylate
- 0.12 g benzoquinone

The 2-hydroxyethyl acrylate was added portion-wise, keeping the exotherm temperature below 60°C. The reaction was continued at 60—70°C for one hour and 226.2 g of ε-caprolactam was added. The reaction was continued at 100°C for one hour and 201.5 g phenoxyethyl acrylate was added and the reaction product, an acrylated blocked isocyanate, was cooled.

Part II. To a 600 ml stainless steel beaker was added:

- 192.1 g trimellitic anhydride
- 116.1 g 2-hydroxyethyl acrylate
- 2.6 g benzoquinone

The reactants were heated to 120°C for 1—1/2 hours to an acid number of 364 to produce an acrylate adduct.

A five-liter reaction flask equipped as in Example 1 was charged with 66.0 g of the above material along with 1928.4 g of a bisphenol A epoxy resin having an epoxy equivalent weight of 2200, 1988.4 g of phenoxyethyl acrylate and 17.1 g of triethanolamine. The reactants were heated to 140—150°C for 1—1/2 hours to an acid number of 2 to 5 to produce an acrylated epoxy.

A blend was prepared containing 45.0 g of Part II, 5.0 g of Part I, and 2.0 g of "Vicure 10" photoinitiator. The film was flexible and hard and the hardness improved with a post-cure to 4H/5H.

Example 4

To 100.0 g of the formulation of Example 1 was added 50.0 g of hexanediol diacrylate and 2.0 g of "Vicure 10" photoinitiator. The coatings were slightly harder than those of Example 1, but still lacked the desired flexibility.

Example 5

To 100.0 g of the formulation of Example 2 were added 50.0 g of trimethylolpropane triacrylate and 2.0 g of "Vicure 10" photoinitiator. Good hardness (5H—6H) was obtained, but low flexibility.

Example 6

To 100.0 g of the formulation of Example 3 was added 50.0 g tetraethyleneglycol diacrylate and 2.0 g "Vicure 10" photoinitiator. The film was hard (3H/4H) and flexible (180° bend) but showed a lack of adhesion.

Example 7

The reaction of Part I of Example 3 was duplicated but 376.0 g of an epoxy with an epoxy equivalent weight of 188 replaced the 201.5 g of phenoxyethyl acrylate at the end of the reaction.

To 25.0 g of this material was added 25.0 g of Part II of Example 3 and 2.0 g of "Vicure 10" photoinitiator. The UV-cured coating had good hardness and flexibility. The hardness was improved to 4H/5H with a post-cure but the flexibility was reduced to passing a 90° bend.

Example 8

To 20.0 g of the composition of Example 7 was added 10.0 g of dicyclopentadiene acrylate plus 0.4 g "Vicure 10" photoinitiator. The UV-cured film was harder than that of Example 7 and the flexibility was lower. After post-cure, both the flexibility and hardness were good.

Example 9

To 20.0 g of the composition of Example 3 was added 10.0 g dicyclopentadiene acrylate plus 0.4 g of "Vicure 10" photoinitiator. The UV-cured coating was brittle but the post-cured coating was flexible with good hardness.

5

Example 10

To 20.0 g of the composition of Example 3 was added 10.0 g of 2-phenoxyethyl acrylate plus 0.4 g of "Vicure 10" photoinitiator. The UV-cured coating was flexible with fair hardness. After post-cure the hardness was improved to H/2H and the good flexibility was retained.

10

Example 11

To 20.0 g of the composition of Example 3 was added 7.5 g dicyclopentadiene acrylate and 2.5 g tetraethylene glycol diacrylate and 0.4 g "Vicure 10" photoinitiator. The UV-cured coating was brittle and the post-cured coating was flexible with good hardness (3H/4H).

15

Example 12

To 20.0 g of the composition of Example 3 was added 7.5 g phenoxyethyl acrylate plus 2.5 g tetraethylene glycol diacrylate plus 0.4 g "Vicure 10" photoinitiator. The UV-cured panel showed a hardness of 3B/H which was increased to 2H/3H with post-cure. Flexibility was good before and after post-cure.

20

25

30

35

40

45

50

55

60

65

Example	Build	UV Cured			UV-Cured plus 4 hr. 145°C		Post-Bake Bend Test (¹ / ₁₆ Dia. Mandrel)
		Pencil Hardness (ASIM D363—74)	Bend Test (¹ / ₁₆ Dia. Mandrel)		Pencil Hardness	Change	
1	.0058"	3B/H	45° Fails ⁽¹⁾	2B/3H	+3	90° Cracks	
2	.0041"	3H/4H	Brittle Film Poor Adhesion	3H/4H	0	90° Cracks	
3	.0052"	3B/H	Flexible Film Good Adhesion	4H/5H	+4	180° O.K.	
4	.0334"	2H/3H	Fails	3H/4H	+1	90° Cracks	
5	.0035"	5H/6H	Fails 45°	6H/7H	+1	90° Cracks	
6	.0050"	3H/4H	180° O.K. ⁽¹⁾	6H/7H	+3	180° O.K.	
7	.0058"	3B/H	Flexible Film Fair Adhesion	4H/5H	+4	90° O.K. 180° Cracks	
8	.0033"	3H/4H	90° Fails	4H/5H	+1	180° O.K.	
9	.0024"	3B/H	90° Cracks 180° Separates	2H/3H	+2	90° O.K. 180° O.K.	
10	.0023"	3B/H	90° O.K. 180° O.K.	H/2H	+1	90° O.K. 180° O.K.	
11	.0029"	3B/H	90° Cracks 180° Separates	3H/4H	+3	90° OK 180° O.K.	
12	.0022"	3B/H	90° O.K. [*] 180° O.K.	2H/3H	+2	90° O.K. 180° O.K.	

⁽¹⁾ Flexible but adheres poorly. Can be peeled like a strippable coating.

Example 13

The coated Q-panels of Examples 3, 6, 8, 10, and 12 were selected for 28-day tests at 150°C sealed in transformer oil. The results of 180° bend tests and hardness tests after aging are shown in the table which follows. The composition of Examples 3, 10, and 12 passed the bend tests with both UV-cured and post-cured panels after the 150°C aging test. The post-cured panels of Example 10 retained the initial hardness after aging (H/2H). The post-cured panels of Example 12 increased two more grades in hardness with aging to 4H/5H.

180° Bend Test

Example	UV-Cure	Post-Baked	Hardness Post-Baked
3	Pass	Pass	—
6	Fail	Fail	—
8	Fail	Pass	—
10	Pass	Pass	H/2H
12	Pass	Pass	4H/5H

Post-Baked 4 Hr. at 145°C.

Example 14

The solutions of Example 10 and 12 were coated on #17 AWG aluminum wire at 20 ft/min to 60 ft/min using a 49 mil bullet die and curing with four 12-inch UV mercury lamps at 300 watts/in. with the lamps parallel to the wire travel spaced 90° apart around the wire. The results are given in the table which follows:

Wire Speed ft/min	Example 10			Example 12		
	20	40	60	20	40	60
Smoothness	Smooth	Smooth	Smooth	Smooth	Smooth	Smooth
Build, mil	1.8	1.8	1.8	1.6—1.8	1.6—1.8	1.6—1.8
Quick Snap	Pass	Pass	Pass	Pass	Pass	Pass
Elongation + 1X mandrel ²	25%	25%	25%	20	20	20
Cut-through Temperature ³	73°C	—	—	92°C	—	—

¹ — Passed parallel to 4 UV lamps, 12 inches long at 300 watt/in.

² — Maximum elongation passing a 1X mandrel.

³ — 2 Kg weight on crossed wire — temperature increased at 5°C/min.

Example 15

Good flexible coating at 1.6—1.8 mils build were obtained using the composition of Examples 10 and 12, on AWG 17 aluminum wire coated at 20 ft/min. The 20 ft/min coatings were aged for 28 days at 150°C in transformer oil. The results of cut-through tests are shown in the table which follows. The cut-through resistance of Example 12 increased from 92°C as made, to 150°C after four hours post-cure at 145°C and to 186°C after four hours post-cure plus 28 days aging in hot oil.

Cut-Through Temperature¹

	Formulation	As Made	Post-Baked 4 Hr. @ 145°C	Post-Baked + 28 Days in 150°C Oil
5	Example 10	73°C	103°C	114°C
10	Example 12	92°C	150°C	186°C

Two kg weight on crossed wires temperature increased 5°C min.

Example 16

The composition of Example 12 was chosen for final evaluation by coating on 0.010 inch by 5—½ inch aluminum strip. Two thousand feet of strip was successfully coated by continuously pumping excess coating on the strip and by pulling the wet strip through two grooved metering bars (die pins) held in a spring-loaded fixture. The die pins were separated by shims (10 mil strip — 13 mil shims). The wet coated strip was irradiated by exposing it at 10 FPM to two ten-inch Fusion Systems "H" lamps at 300 watts/inch, one lamp for each side of the strip. The coated strip was rewound into round supply coils, similar to those on which bar strip is supplied. This aluminum strip was wound into thirteen 10 kVa 7200 V transformers, which have all passed production tests. The results of thermal life tests on these transformers were extraordinarily successful. Three transformers thermally aged at 200°C have exceeded 1500 hours life, which is ten times the required life at that temperature. At 180°C the units have exceeded 2200 hours life, which is almost five times the required life at that temperature. The UV coatings on strip removed from transformers aged at 200°C still retain good color, flexibility and adhesion long after the Formvar wire enamel in the high voltage windings is badly discolored and embrittled.

The enamel of this composition performs ideally as an aluminum strip insulation since it cures to a "B-state" during the UV cure. It then completes its cure during the coil bake, developing turn-to-turn adhesion. A bifilar test coil wound from two strips of 0.010 inch by 5—½ inch aluminum enameled with the composition of Example 12 developed excellent turn-to-turn adhesion during a standard coil bake while maintaining good turn-to-turn electric strength.

The viscosity of Example 12 measured 5900 cp at 26°C when prepared, which is a convenient viscosity for strip coating. The tank life at 26°C was good. After two months at 26°C the viscosity was 6030 cp and after ten months it had increased to only 8000 cp.

Example 17

Part I. Into a one liter reaction flask are charged the following:

174.1 g toluene diisocyanate (80% 2,4 and 20% 2,6)

116.1 g 2-hydroxyethyl acrylate

0.12 g benzoquinone

The 2-hydroxyethyl acrylate was added portion wise with the benzoquinone dissolved in. The exotherm temperature was kept below 60°C. The reaction was continued at 60—70°C for one hour and 185.0 g hexamethylmelamine was added. The reaction was continued at 120—125°C for ½ hour and 121.2 g phenoxyethyl acrylate was added and the solution cooled.

To 80.0 g of the solution of Example 12 was added 20.0 g of Part I. The UV cured coating was flexible and showed a hardness of 1H/2H before post-cure and a hardness of 3H/4H after post cure. It also showed an improvement of thermoplastic flow temperature after post-cure when compared with Example 12.

Example 18

Into a 2-liter flask equipped with a motor stirrer, air condenser and nitrogen sparge was added:

696.4 g toluene diisocyanate

506.6 g 2-phenoxyethyl acrylate

1.76 g benzoquinone

To this solution was added slowly with cooling 270.8 g of 1,4-butanediol, keeping the exotherm temperature below 120°C. The reaction was continued at 125°C for one hour, then cooled to 100°C then 232.2 g 2-hydroxyethyl acrylate was added slowly and reacted for an additional hour at 125°C. The product was dissolved in 426.9 g of 2-phenoxyethyl acrylate and cooled.

To 80.0 g of the blend of Example 12 was added 20.0 g of the above acrylated urethane. The UV coated panel showed excellent flexibility and hardness which improved after a thermal a post-cure.

Claims

1. A UV curable coating composition characterized in that said composition comprises

(A) from 20 to 40% by weight of an acrylated epoxy which comprises the reaction product of about 2 equiv. of an epoxy resin having an E.E.W. of from 1500 to 5000, and from 0.9 to 1.1 equiv. of

(1) an anhydride acrylate adduct where said anhydride acrylate adduct has a functionality of 1 except in the case of trimellitic anhydride where said adduct has a functionality of 2, where said anhydride acrylate adduct comprises the reaction product of

(a) an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate and mixtures thereof; and

(b) 1 mole, ± 10 mole %, per mole of said acrylate of an anhydride selected from phthalic anhydride, maleic anhydride, trimellitic anhydride, and mixtures thereof; and/or

(2) an isocyanate which comprises the reaction product of

(a) 1 mole of an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate, and mixtures thereof; and,

(b) and 1 mole of toluene diisocyanate, 4,4'-diisocyanatodiphenylmethane, or mixtures thereof;

(B) from 4 to 15% by weight of an acrylated blocked isocyanate which comprises the reaction product of 1 mole caprolactam and 1 mole of an isocyanate adduct which comprises the reaction product of

(1) 1 mole of an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate, and mixtures thereof; and

(2) from 0.99 to 1.01 mole of a compound selected from toluene diisocyanate, 4,4'-diisocyanatodiphenylmethane, and mixtures thereof;

(C) from 45 to 65% by weight of a monoacrylate, of which at least 60% by weight is phenoxyethyl acrylate;

(D) from 5 to 20% by weight of a polyacrylate, of which at least about 50% is tetraethylene glycol diacrylate;

(E) from 2 to 5% by weight of a photoinitiator;

(F) from 0.05 to 0.3% by weight inhibitor; and

(G) up to 30% by weight of a compound selected from acrylated hexamethoxymethyl-melamine, acrylated urethane and mixtures thereof.

2. A composition according to claim 1, characterized in that the epoxy resin is bisphenol A epoxy resin.

3. A composition according to claim 1 or 2, characterized in that the inhibitor is selected from benzoquinone, hydroquinone, and mixtures thereof.

4. A UV curable coating composition characterized in that said composition comprises

(A) from 25 to 35% by weight of an acrylated epoxy which comprises the reaction product of

(1) a bisphenol A epoxy resin having an E.E.W. of from 1500 to 5000;

(2) an acrylate adduct which comprises the reaction product of

(a) an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxyethyl acrylate, and mixtures thereof; and

(b) 1 mole, ± 10 mole% per mole of said acrylate, of trimellitic anhydride,

(B) from 4 to 10% by weight of an acrylated blocked isocyanate which comprises the reaction product of

(1) Caprolactam; and

(2) 1 mole, ± 1 mole %, per mole of said caprolactam, of an isocyanate adduct which comprises the reaction product of

(a) an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, and mixtures thereof;

(b) 1 mole, ± 1 mole %, per mole of said acrylate, of toluene diisocyanate, 4,4'-diisocyanatodiphenylmethane or mixtures thereof;

(C) from 50 to 60% by weight of a monoacrylate, of which at least 60% by weight is phenoxyethyl acrylate;

(D) from 7 to 11% by weight of a polyacrylate, of which at least about 50% is tetraethylene glycol diacrylate;

(E) from 2 to 5% of a photoinitiator;

(F) from 0.05 to 0.3% inhibitor; and

(G) from 10 to 20% by weight of a compound selected from acrylated hexamethoxymethyl-melamine, acrylated urethane, and mixtures thereof.

5. A method of preparing a UV curable coating composition characterized by

(1) forming an acrylate adduct by reacting, in the presence of a monoacrylate and an inhibitor, an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate, and mixtures thereof, with

(a) 1 mole, ± 10 mole %, per mole of said acrylate, of a compound selected from phthalic anhydride, maleic anhydride, trimellitic anhydride, and mixtures thereof and/or

(b) 1 mole, ± 1 mole %, per mole of said acrylate, of a compound selected from toluene diisocyanate, 4,4'-diisocyanatodiphenylmethane, and mixtures thereof.

(2) forming an acrylated epoxy by reacting said acrylate adduct with an epoxy resin having an E.E.W. of from 1500 to 5000 in the presence of a monoacrylate and an inhibitor;

(3) forming an acrylated isocyanate by reacting an acrylate selected from 2-hydroxyethyl acrylate, 2-hydroxypropyl acrylate, 2-hydroxyethyl methacrylate, and mixtures thereof, with 1 mole, ± 1 mole %, per mole of said acrylate, of a compound selected from toluene diisocyanate, 4,4'-diisocyanatodiphenyl-

methane, and mixtures thereof, in the presence of a monoacrylate and an inhibitor;

(4) forming an acrylated blocked isocyanate by reacting caprolactam with 1 mole %, per mole of said caprolactam, of said acrylated isocyanate;

(5) forming a blend of

(a) from 20 to 40% by weight of said acrylated epoxy;

(b) from 4 to 15% by weight of said acrylated blocked isocyanate;

(c) from 45 to 65% by weight of said monoacrylate, of which at least 60% by weight is phenoxyethyl acrylate;

(d) from 5 to 20% by weight of a polyacrylate, of which at least about 50% is tetraethylene glycol diacrylate;

(e) from 2 to 5% by weight of a photoinitiator; and

(f) from 0.05 to 0.3% by weight inhibitor.

6. A method of forming a coating on a conductor characterized by

(A) applying a composition according to any of claims 1 to 4 to said conductor;

(B) curing said composition by exposure to UV radiation;

(C) forming said conductor into a coil; and

(D) post curing said coil with heat.

7. A method according to claim 6, characterized in that the conductor is a metal strip.

8. A method according to claim 7, characterized in that the metal is aluminum.

9. A method according to claim 8, characterized by the additional step between steps (B) and (C) of winding the metal strip into a transformer coil.

10. A transformer coil made according to the method of claim 9.

Patentansprüche

1. Eine durch UV-Strahlen härtbare Beschichtungszusammensetzung, dadurch gekennzeichnet, daß die Zusammensetzung folgendes umfaßt:

(A) 20 bis 40 Gew% eines acylierten Epoxyharzes, welches das Reaktionsprodukt von etwa zwei Äquivalenten eines Epoxyharzes mit einem Epoxyäquivalentgewicht von 1500 bis 5000, sowie von 0,9 bis 1,1 Äquivalenten von

(1) einem Anhydrid-Acrylat-Addukt, wo das Anhydrid-Acrylat-Addukt eine Funktionalität von 1 aufweist, ausgenommen im Fall von trimellitischem Anhydrid, wo das Addukt eine Funktionalität von 2 aufweist, wobei das Anhydrid-Acrylat-Addukt das Reaktionsprodukt von

(a) einem Acrylat, ausgewählt aus 2-Hydroxyäthyl-Acrylat, 2-Hydroxypropyl-Acrylat, 2-Hydroxyäthyl-Methacrylat und Mischungen davon; und von

(b) 1 Mol, ± 10 Mol%, pro Mol des Acrylats, eines Anhydrids, ausgewählt aus phthalischem Anhydrid, Maleinanhydrid, trimellitischem Anhydrid und Mischungen davon umfaßt; und/oder

(2) einem Isocyanat umfaßt, das das Reaktionsprodukt von

(a) 1 Mol eines Acrylats, ausgewählt aus 2-Hydroxyäthyl-Acrylat, 2-Hydroxypropyl-Acrylat, 2-Hydroxyäthyl-Methacrylat, und Mischungen davon; und von

(b) 1 Mol Toluoldiisocyanat, 4,4'-Diisocyanatodiphenylmethan, oder Mischungen davon; umfaßt, (B) 4 bis 15 Gew% eines acylierten geblockten Isocyanats, welches das Reaktionsprodukt von 1 Mol Caprolactam und 1 Mol eines Isocyanat-Adduktes umfaßt, welches das Reaktionsprodukt von

(1) 1 Mol eines Acrylats, ausgewählt aus 2-Hydroxyäthyl-Acrylat, 2-Hydroxypropyl-Acrylat, 2-Hydroxyäthyl-Methacrylat, und Mischungen davon; und von

(2) 0,99 bis 1,01 Mol einer Verbindung, ausgewählt aus Toluol-Diisocyanat, 4,4'-Diisocyanatodiphenylmethan, und Mischungen davon; umfaßt,

(C) 45 bis 65 Gew% eines Monoacrylats, von dem zumindest 60 Gew% Phenoxyäthyl-Acrylat ist;

(D) 5 bis 20 Gew% eines Polyacrylats, von dem zumindest etwa 50% Tetraäthylenglykol-Diacrylat ist;

(E) 2 bis 5 Gew% eines Photoinitiators;

(F) 0,05 bis 0,3 Gew% Inhibitor; und

(G) bis zu 30 Gew% einer Verbindung, ausgewählt aus acyliertem Hexamethoxymethyl-Melamin, acyliertem Urethan und Mischungen davon.

2. Eine Zusammensetzung nach Anspruch 1, dadurch gekennzeichnet, daß das Epoxyharz ein Bisphenol-A-Epoxyharz ist.

3. Eine Zusammensetzung nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß der Inhibitor ausgewählt ist aus Benzoquinon, Hydroquinon und Mischungen davon.

4. Eine durch UV-Strahlen härtbare Beschichtungszusammensetzung, dadurch gekennzeichnet, daß die Zusammensetzung folgendes umfaßt:

(A) 25 bis 35 Gew% eines acylierten Epoxyharzes, das das Reaktionsprodukt von

(1) einem Bisphenol-A-Epoxyharz mit einem Epoxy-äquivalentgewicht von 1500 bis 5000;

(2) einem Acrylat-Addukt umfaßt, das das Reaktionsprodukt von

(a) einem Acrylat ausgewählt aus 2-Hydroxyäthyl-Acrylat, 2-Hydroxyäthyl-Acrylat, und Mischungen davon; und

(b) 1 Mol, ± 10 Mol% pro Mol des Acrylats, trimellitisches Anhydrid, umfaßt;

- (B) 4 bis 10 Gew% eines acrylierten geblockten Isocyanats, das das Reaktionsprodukt von
 (1) Caprolactam; und
 (2) 1 Mol, ± 1 Mol%, pro Mol des Caprolactam, Isocyanat-Addukt umfaßt, welches das
 Reaktionsprodukt von
 5 (a) einem Acrylat, ausgewählt aus 2-Hydroxyäthyl-Acrylat, 2-Hydroxypropyl-Acrylat, und
 Mischungen davon;
 (b) 1 Mol, ± 1 Mol%, pro Mol des Acrylats, Toluol-diisocyanat, 4,4'-Diisocyanato-Diphenyl-Methan
 oder Mischungen davon, umfaßt;
 (C) 50 bis 60 Gew% eines Monoacrylats, von dem zumindest 60 Gew% Phenoxyäthyl-Acrylat ist;
 10 (D) 7 bis 11 Gew% eines Polyacrylat, von dem zumindest etwa 50% Tetraäthylen-Glykol-Diacrylat ist;
 (E) 2 bis 5% eines Photoinitiators;
 (F) 0,05 bis 0,3% Inhibitor; und
 (G) 10 bis 20 Gew% einer Verbindung, ausgewählt aus acryliertem Hexamethoxymethyl-Melamin,
 acryliertem Urethan, und Mischungen davon; umfaßt.
 15 5. Verfahren zur Herstellung einer durch UV-Strahlen aushärtbaren Beschichtungszusammensetzung,
 gekennzeichnet durch
 (1) Bilden eines acrylierten Adduktes durch Reagieren, in der Anwesenheit von Monoacrylat und
 einem Inhibitor, von einem Acrylat, ausgewählt aus 2-Hydroxyäthyl-Acrylat, 2-Hydroxypropyl-Acrylat, 2-
 Hydroxyäthyl-Methacrylat, und Mischungen davon, mit
 20 (a) 1 Mol, ± 10 Mol%, pro Mol des Acrylats, einer Verbindung, ausgewählt aus phthalischem
 Anhydrid, Malein-Anhydrid, trimellitischem Anhydrid, und Mischungen davon, und/oder
 (b) 1 Mol, ± 1 Mol%, pro Mol des Acrylats, einer Verbindung, ausgewählt aus Toluol-Diisocyanat,
 4,4'-Diisocyanato-Diphenylmethan, und Mischungen davon;
 (2) Formen eines acrylierten Epoxyharzes durch Reagieren des Acrylat-Adduktes mit einem
 25 Epoxyharz, das ein Epoxyäquivalentgewicht von 1500 bis 5000 besitzt, in Anwesenheit eines Monoacrylats
 und eines Inhibitors;
 (3) Bilden eines acrylierten Isocyanats durch Reagieren eines Acrylats, ausgewählt aus 2-Hydroxy-
 äthyl-Acrylat, 2-Hydroxypropyl-Acrylat, 2-Hydroxyäthyl-Methacrylat, und Mischungen davon, mit 1 Mol,
 ± 1 Mol%, pro Mol des Acrylats, einer Verbindung, ausgewählt aus Toluol-Diisocyanat, 4,4'-Diisocyanato-
 30 Diphenylmethan, und Mischungen davon, in der Anwesenheit eines Monoacrylats und eines Inhibitors;
 (4) Bilden eines acrylierten geblockten Isocyanats durch Reagieren von Caprolactam mit 1 Mol, ± 1
 Mol%, pro Mol des Caprolactams, acryliertem isocyanat;
 (5) Bilden einer Mischung aus
 (a) 20 bis 40 Gew% des acrylierten Epoxyharzes;
 35 (b) 4 bis 15 Gew% des acrylierten geblockten Isocyanats;
 (c) 45 bis 65 Gew% des Monoacrylats, von dem zumindest 60 Gew% Phenoxyäthyl-Acrylat ist;
 (d) 5 bis 20 Gew% eines Polyacrylats, von dem zumindest etwa 50 Gew% Tetraäthylen-Glykol-
 Diacrylat ist;
 (e) 2 bis 5 Gew% eines Photoinitiators; und
 40 (f) 0,05 bis 0,3 Gew% Inhibitor.
 6. Ein Verfahren zur Bildung einer Beschichtung auf einem Leiter, gekennzeichnet durch
 (A) Aufbringen einer Zusammensetzung gemäß einem der Ansprüche 1 bis 4 auf den Leiter;
 (B) Härten der Zusammensetzung durch Bestrahlung mit Ultraviolettstrahlung;
 (C) Formen des Leiters zu einer Spule; und
 45 (D) Nachhärten der Spule mit Hitze.
 7. Ein Verfahren nach Anspruch 6, dadurch gekennzeichnet, daß der Leiter ein Metallstreifen ist.
 8. Ein Verfahren nach Anspruch 7, dadurch gekennzeichnet, daß das Metall Aluminium ist.
 9. Ein Verfahren nach Anspruch 8, dadurch gekennzeichnet, durch den zusätzlichen Schritt des
 Wickelns des Metallstreifens zu einer Transformatorspule zwischen den Schritten (B) und (C).
 50 10. Eine Transformatorspule, hergestellt gemäß dem Verfahren von Anspruch 9.

Revendications

1. Composition de revêtement durcissable par irradiation ultraviolette, caractérisée en ce que ladite
 55 composition comprend:
 (A) de 20 à 40% en poids d'un époxyde combiné avec un acrylate, qui comprend le produit de réaction
 d'environ 2 équivalents d'une résine époxy ayant un poids d'équivalent époxy (PEE) de 1500 à 5000, et de
 0,9 à 1,1 équivalent de
 (1) un adduct d'acrylate et-anhydride, ledit adduct d'acrylate et anhydride ayant une fonctionnalité
 60 de 1, sauf que le cas de l'anhydride trimellitique où ledit adduct a une fonctionnalité de 2, ledit adduct
 d'acrylate et anhydride comprenant le produit de réaction de
 (a) un acrylate choisi parmi l'acrylate de 2-hydroxyéthyle, l'acrylate de 2-hydroxypropyle, le
 méthacrylate de 2-hydroxyéthyle, et des mélanges de ceux-ci; et
 (b) 1 mole, $\pm 10\%$ en mole, par mole dudit acrylate, d'un anhydride choisi parmi l'anhydride
 65 phthalique, l'anhydride maléique, l'anhydride trimellitique et des mélanges de ceux-ci; et/ou

(2) un isocyanate qui comprend le produit de réaction de:

(a) 1 mole d'un acrylate choisi parmi l'acrylate de 2-hydroxyéthyle, l'acrylate de 2-hydroxypropyle, le méthacrylate de 2-hydroxyéthyle et des mélanges de ceux-ci; et

(b) 1 mole de diisocyanate de toluène, 4,4'-diisocyanatodiphénylméthane ou mélanges de ceux-ci;

(B) de 4 à 15% d'un isocyanate bloqué, combiné à un acrylate, qui comprend le produit de réaction d'une mole de caprolactame et d'une mole d'un adduct d'isocyanate, lequel comprend le produit de réaction de

(1) 1 mole d'un acrylate choisi parmi l'acrylate de 2-hydroxyéthyle, l'acrylate de 2-hydroxypropyle, le méthacrylate de 2-hydroxyéthyle et des mélanges de ceux-ci, et

(2) de 0,99 à 1,01 mole d'un composé choisi parmi le diisocyanate de toluène, le 4,4'-diisocyanatodiphénylméthane et des mélanges de ceux-ci;

(C) de 45 à 65% en un poids d'un monoacrylate dont au moins 60% en poids sont constitués par de l'acrylate de phénoxyéthyle,

(D) de 5 à 20% en poids d'un polyacrylate dont au moins environ 50% sont constitués par du diacrylate de tétraéthylèneglycol;

(E) de 2 à 5% en poids d'un photo-initiateur;

(F) de 0,05 à 0,3% en poids d'inhibiteur; et

(G) jusqu'à 30% en poids d'un composé choisi parmi une hexaméthoxyméthylmélamine combinée à un acrylate, un méthanne combiné à un acrylate, et des mélanges de ceux-ci.

2. Composition selon la revendication 1, caractérisée en ce que la résine époxy est une résine époxy à base de bisphénol A.

3. Composition selon la revendication 1 ou 2, caractérisée en ce que l'inhibiteur est choisi parmi la benzoquinone, l'hydroquinone, et des mélanges de celles-ci.

4. Composition de revêtement durcissable par irradiation UV, caractérisée en ce que ladite composition comprend:

(A) de 25 à 35% en poids d'un époxyde combiné à un acrylate, qui comprend le produit de réaction de

(1) une résin époxy à base de bisphénol A, ayant un PEE de 1500 à 5000;

(2) un adduct d'acrylate qui comprend le produit de réaction de

(a) un acrylate choisi parmi l'acrylate de 2-hydroxyéthyle, l'acrylate de 2-hydroxypropyle et des mélanges de ceux-ci; et

(b) 1 mole, \pm 10% en mole, par mole dudit acrylate, d'hydride trimellitique,

(B) de 4 à 10% en poids d'un isocyanate bloqué, combiné à un acrylate, qui comprend le produit de réaction de

(1) caprolactame; et

(2) 1 mole, \pm 1% en mole, par mole dudit caprolactame, d'un adduct d'isocyanate, qui comprend le produit de réaction de

(a) un acrylate choisi parmi l'acrylate de 2-hydroxyéthyle, l'acrylate de 2-hydroxypropyle et des mélanges de ceux-ci;

(b) 1 mole, \pm 1% en mole, par mole dudit acrylate, de diisocyanate de toluène, 4,4'-diisocyanatodiphénylméthane ou de mélanges de ceux-ci;

(C) de 50 à 60% en poids d'un monoacrylate, dont au moins 50% en poids sont constitués par de l'acrylate de phénoxyéthyle;

(D) de 7 à 11% en poids d'un polyacrylate, dont au moins environ 50% en poids sont constitués par du diacrylate de tétraéthylèneglycol;

(E) de 2 à 5% d'un photo-initiateur;

(F) de 0,05 à 0,3% d'inhibiteur; et

(G) de 10 à 20% en poids d'un composé choisi parmi l'hexaméthoxyméthylmélamine combinée à un acrylate, un uréthane combiné à un acrylate, et des mélanges de ceux-ci.

5. Procédé pour la préparation d'une composition de revêtement durcissable par irradiation UV, caractérisé par:

(1) la formation d'un adduct d'acrylate par réaction, en présence d'un monoacrylate et d'un inhibiteur, d'un acrylate choisi parmi l'acrylate de 2-hydroxyéthyle, l'acrylate de 2-hydroxypropyle, le méthacrylate de 2-hydroxyéthyle et des mélanges de ceux-ci, avec

(a) 1 mole, \pm 10% en mole, par mole dudit acrylate, d'un composé choisi parmi l'anhidride phthalique, l'anhidride maléique, l'anhidride trimellitique et des mélanges de ceux-ci, et/ou

(b) 1 mole, \pm 1% en mole, par mole dudit acrylate, d'un composé choisi parmi le diisocyanate de toluène, le 4,4'-diisocyanatodiphénylméthane et des mélanges de ceux-ci;

(2) la formation d'un époxyde combiné à un acrylate, par réaction dudit adduct d'acrylate avec une résine époxyde ayant un PEE de 1500 à 5000, en présence d'un monoacrylate et d'un inhibiteur;

(3) la formation d'un isocyanate combiné à un acrylate, par réaction d'un acrylate choisi parmi l'acrylate de 2-hydroxyéthyle, l'acrylate de 2-hydroxypropyle, le méthacrylate de 2-hydroxyéthyle et des mélanges de ceux-ci, avec 1 mole, \pm 1% en mole, par mole dudit acrylate, d'un composé choisi parmi le diisocyanate de toluène, le 4,4'-diisocyanatodiphénylméthane, et des mélanges de ceux-ci, en présence d'un monoacrylate et d'un inhibiteur;

(4) la formation d'un isocyanate bloqué, combiné à un acrylate, par réaction du caprolactame avec 1 mole, \pm 1% en mole, par mole dudit caprolactame, dudit isocyanate combinée à un acrylate;

(5) la formation d'un mélange de

(a) de 20 à 40% en poids dudit époxyde combiné à un acrylate;

(b) de 4 à 15% en poids dudit isocyanate bloqué, combiné à un acrylate;

(c) de 45 à 65% en poids dudit monoacrylate, dont au moins 50% en poids sont constitués par de l'acrylate de phénoxyéthyle;

(d) de 5 à 20% en poids d'un polyacrylate, dont au moins 50% en poids sont constitués par du diacrylate de tétraéthylèneglycol;

(e) de 2 à 5% en poids d'un photo-inhibiteur; et

(f) de 0,05 à 0,3% en poids d'un inhibiteur.

6. Procédé pour la formation d'un revêtement sur un conducteur, caractérisé par

(A) l'application sur ledit conducteur d'une composition selon l'une quelconque des revendications 1 à 4;

(B) le durcissement de ladite composition par exposition à un rayonnement UV;

(C) la mise dudit conducteur sous forme d'une bobine; et

(D) le durcissement ultérieur de ladite bobine à la chaleur.

7. Procédé selon la revendication 6, caractérisé en ce que le conducteur est une bande de métal.

8. Procédé selon la revendication 7, caractérisé en ce que le métal est l'aluminium.

9. Procédé selon la revendication 8, caractérisé par l'étape supplémentaire, entre les étapes (B) et (C), d'enroulement de la bande de métal en un enroulement pour transformateur.

10. Enroulement pour transformateur, fabriqué selon le procédé de la revendication 9.